





Type 8540-1011

The 8540-1011 is used to transfer local area network coaxial cables for redundant hardware.

FEATURES

- Energized indicator LED
- Relay coil has transient suppression and reverse polarity diodes
- Glass epoxy printed circuit board is conformal coated for moisture and corrosion resistance
- TS 35×7,5 rail mount


BNC RELAY

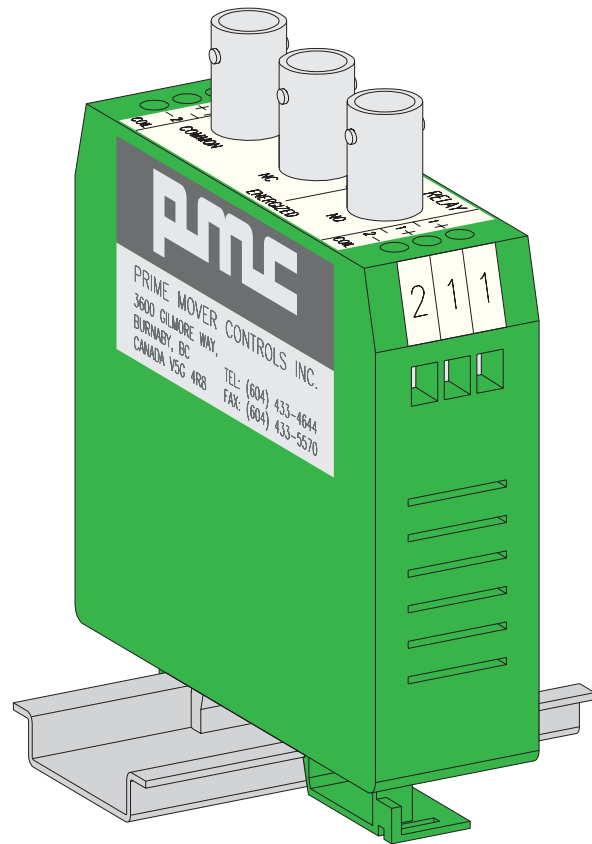

PRIME MOVER CONTROLS INC.

DIMENSIONS FOR 8540-1011 BNC RELAY

SCALE 1 : 1

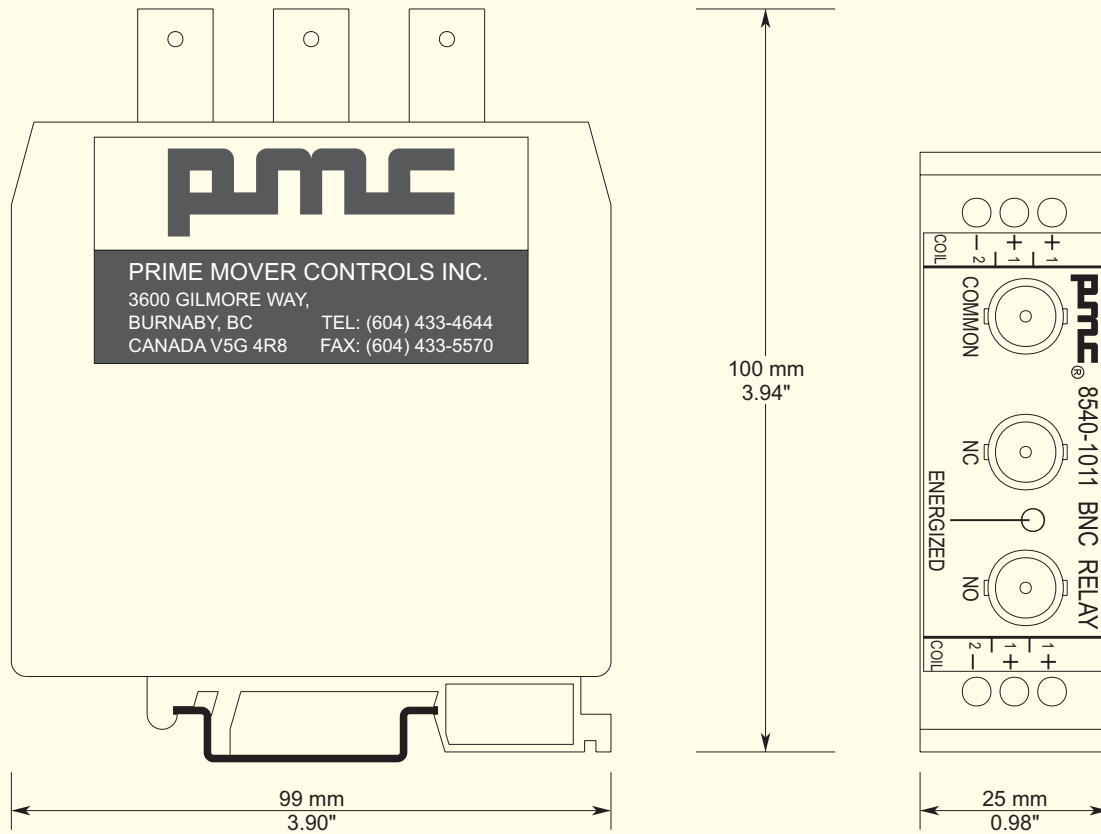

SPECIFICATIONS:

Supply 24 VDC:


- Nominal 24 V_{DC}, range 18 to 35 V_{DC}
- 60 mA nominal
- Reverse voltage protection

Environmental:

- Operating temperature -40 to +70°C
- Storage temperature -55 to +85°C
- Vibration: range 3 to 100 Hz
Velocity amplitude 100 mm/sec below 22 Hz
Acceleration 0.7 g above 22 Hz

Physical:

- IP40 enclosure
- Dimensions 100 mm H × 79 mm W × 25 mm D
(3.94" H × 3.11" W × 0.98" D)
- Weight 0.09 kg (0.20 lbs)
- Terminal blocks for 14 to 20 AWG wires

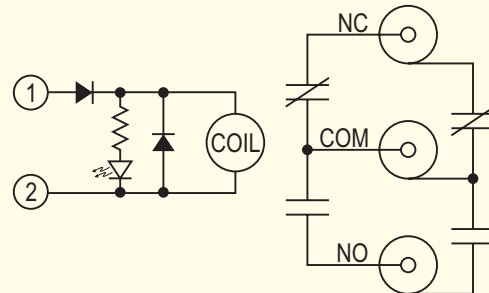

PRIME MOVER CONTROLS INC.

3600 GILMORE WAY, BURNABY B.C. CANADA V5G 4R8
TEL (604) 433-4644 FAX (604) 433-5570 email: info@pmc-controls.com